

# Product Environmental Profile

## Line metered PDU (PXE, PX-1k)



### COMPANY OVERVIEW

**• Sustainability built in to support our associates, customers, and the environment**

At Legrand North and Central America, we're committed to leading by example within our own operations, to developing high quality solutions for our customers' High Performance Buildings, and to transforming how people live and work – more safely, more comfortably, more efficiently.

**• Better Performance**

A core principle of designing for sustainability drives us to innovate products and systems that enable buildings to reach exceptional levels of performance, bringing about industry-leading ideas, inventions and initiatives.

**• Better Operations**

A commitment to a leadership role in operational excellence through environmental management, optimizing the way we manage energy, water and waste.

**• Better Lives**

A dedication to enhancing employee and community welfare through programs that help people enjoy healthier, more productive and more rewarding lives.

For more information on Legrand's PEPs and other sustainability initiatives, visit [legrand.us/sustainability](http://legrand.us/sustainability).



### LEGRAND'S ENVIRONMENTAL COMMITMENTS

**• Incorporate environmental management into our industrial sites**

Of all Legrand sites worldwide, over 85% are ISO 14001 certified (sites belonging to Legrand for more than five years).

**• Offer our customers environmentally friendly solutions**

Develop innovative solutions to help our customers design more energy efficient, better managed and more environmentally friendly installations.


**• Involve the environment in product design**

Reduce the environmental impact of products over their whole life cycle.

Provide our customers with all relevant information (composition, consumption, end of life, etc.).



### REFERENCE PRODUCT

<p><b>Function</b></p>	<p>The PX Intelligent Rack PDU series provides reliable power distribution for IT equipment cabinets. Support for 200-240V : three phase ,32A ,6.4-7.7kVA.The reference life time of 20 years. that provides reliable power distribution for max 32A under 200-240 V, single phase for IT equipment cabinets through a Mennekes _IEC60309_32A plug. It offers metering at the inlet, outlet through ethernet protocol and through a color lcd display : voltage,current,active or real power, energy, power factor. It offers 20 sockets C13+ 4 sockets C19 protected against by two circuit breaker.</p>
<p><b>Reference Product</b></p>	<div style="text-align: center;">  </div> <p>Part Number 100-51-4931-30 PX3-1493V</p>

The company reserves the right to change specifications and designs without notice. All illustrations, descriptions, dimensions and weights in the document are for guidance and cannot be held binding on the company.

# Product Environmental Profile

## Line metered PDU (PXE, PX-1k)



### PRODUCTS CONCERNED

The environmental data is representative of the line metered PDU (PXE, PX-1k) product family (PX3-1XXX, serial number "XXX" is simply a 3digits number to distinguish variants with same function but different form factors. ). The PDU concerned is fully assembled with power cord and plug.



### CONSTITUENT MATERIALS

This Reference Product contains no substances prohibited by the regulations applicable at the time of its introduction to the market. It respects the restrictions on use of hazardous substances as defined in the RoHS directive 2011/65/EC.

<b>Total weight of Reference Product with unit packaging</b>		<b>9000 g</b>			
Plastics as % of weight		Metals as % of weight		Others as % of weight	
Product					
PVC	<b>13.0%</b>	Aluminium	<b>28.7%</b>	Various electronic components	<b>7.2%</b>
PE	<b>3.6%</b>	Steel	<b>4.0%</b>	cables / electric wires	<b>16.4%</b>
PA	<b>1.1%</b>	Copper alloys	<b>0.5%</b>	electronic card	<b>2.8%</b>
PBT	<b>0.7%</b>	Other metal	<b>0.5%</b>	various others	<b>&lt;0,1%</b>
PC	<b>0.5%</b>				
PP	<b>&lt;0,1%</b>				
various plastics	<b>&lt;0,1%</b>				
Packaging					
PE (packaging)	<b>0.8%</b>			Paper (packaging)	<b>20.2%</b>
<b>Total plastics</b>	<b>19.7%</b>	<b>Total metals</b>	<b>33.7%</b>	<b>Total others</b>	<b>46.6%</b>

Estimated recycled material content: 34% of weight.



### MANUFACTURING

This Reference Product comes from a site that have received ISO 14001 certification.



### DISTRIBUTION

Products are distributed from logistics centers located to optimize transport efficiency. Modeling data represents distribution 688 km by truck, which represent an average logistic for Europe market.

# Product Environmental Profile

## Line metered PDU (PXE, PX-1k)



### INSTALLATION

No electricity is required for installing the Reference Product.



### USE

**Servicing and maintenance:**

Under normal conditions of use, this type of product requires no servicing or maintenance.

**Consumable:**

No consumables are necessary to use this type of product.



### END OF LIFE

• **Hazardous waste\* contained in the product:** no hazardous waste  
 (\*) Hazardous waste as defined by European Commission decision 2000/532/EC.

• **Recycling rate:**

Calculated using the method described in the IEC/TR 62635 technical report, the recyclability rate of the Reference Product is estimated as 79%. This value is based on data collected from a technological channel using industrial procedures. It does not pre-validate the effective use of this channel for end-of-life electrical and electronic products.

Separated into:	[% mass of Reference Product ]
- plastic materials:	18%
- metal materials:	34%
- other materials:	7%
- packing (all materials):	20%



### ENVIRONMENTAL IMPACTS

The evaluation of environmental impacts examines the stages of the Reference Product life cycle: manufacturing, distribution, installation, use, and end of life. It is representative of products marketed and used in Europe.

The following modelling elements were taken into account:

<b>Manufacturing</b>	Packaging taken into account. As required by the PEP ecopassport program, all transport for the manufacturing of the Reference Product, including materials and components, has been taken into account. The waste generated during manufacturing phase has been taken into account.
<b>Distribution</b>	Transport between the last distribution center and an average delivery to the sales area. The default scenario modelled maximizes the environmental impact.
<b>Installation</b>	The end of life of the packaging ( 1890 g ) is taken into account at this phase. Transport of packaging to end of life treatment.
<b>Use</b>	<ul style="list-style-type: none"> <li>• Under normal conditions of use, this type of product requires no servicing or maintenance.</li> <li>• No consumables are necessary to use this type of product.</li> <li>• Use scenario: annual average power dissipation as 10W during the 20 year working life. This modelling duration does not constitute a minimum durability requirement.</li> <li>• Energy model: Electricity Mix; Europe 27 - 2009</li> </ul>
<b>End of life</b>	The default end of life scenario modelled maximizes the environmental impact.
<b>Software used</b>	EIME V5 and its database "CODDE-2018-11" and the indicators defined in the PCR ed 3 in alignment with the EN15804 standard

# Product Environmental Profile


## Line metered PDU (PXE, PX-1k)



### ENVIRONMENTAL IMPACTS (continued)

	Total for Life cycle		Raw material and manufacturing		Distribution		Installation		Use		End of life	
	Value	Unit	Value	%	Value	%	Value	%	Value	%	Value	%
<b>Global warming (GW)</b>	1.11E+03	kg CO <sub>2</sub> eq.	2.55E+02	23%	3.08E-01	< 1%	1.22E-01	< 1%	8.58E+02	77%	6.85E-01	< 1%
<b>Ozone depletion (OD)</b>	6.91E-05	kg CFC-11 eq.	1.32E-05	19%	6.24E-10	< 1%	9.95E-10	< 1%	5.59E-05	81%	1.38E-08	< 1%
<b>Acidification of soil and water (A)</b>	4.38E+00	kg SO <sub>2</sub> eq.	7.91E-01	18%	1.38E-03	< 1%	5.87E-04	< 1%	3.58E+00	82%	2.69E-03	< 1%
<b>Water eutrophication (WE)</b>	3.69E-01	kg PO <sub>4</sub> <sup>3-</sup> eq.	1.49E-01	40%	3.18E-04	< 1%	6.34E-04	< 1%	2.16E-01	59%	3.51E-03	< 1%
<b>Photochemical ozone creation (POCP)</b>	2.52E-01	kg C <sub>2</sub> H <sub>4</sub> eq.	5.52E-02	22%	9.84E-05	< 1%	4.16E-05	< 1%	1.97E-01	78%	2.08E-04	< 1%
<b>Depletion of abiotic resources - elements (ADPe)</b>	2.38E-02	kg Sb eq.	2.37E-02	100%	1.23E-08	< 1%	5.47E-09	< 1%	7.46E-05	< 1%	3.98E-08	< 1%
<b>Total use of primary energy (PE)</b>	2.10E+04	MJ	3.83E+03	18%	4.36E+00	< 1%	1.65E+00	< 1%	1.71E+04	82%	7.78E+00	< 1%
<b>Net use of fresh water (FW)</b>	3.11E+03	m <sup>3</sup>	1.75E+00	< 1%	2.76E-05	< 1%	4.30E-05	< 1%	3.11E+03	100%	4.81E-04	< 1%
<b>Depletion of abiotic resources - fossil fuels (ADPf)</b>	1.30E+04	MJ	3.22E+03	25%	4.33E+00	< 1%	1.59E+00	< 1%	9.74E+03	75%	7.16E+00	< 1%
<b>Water pollution (WP)</b>	7.15E+04	m <sup>3</sup>	3.59E+04	50%	5.07E+01	< 1%	1.84E+01	< 1%	3.54E+04	50%	8.32E+01	< 1%
<b>Air pollution (AP)</b>	4.91E+04	m <sup>3</sup>	1.20E+04	25%	1.26E+01	< 1%	1.53E+01	< 1%	3.69E+04	75%	6.91E+01	< 1%

The values of the 27 impacts defined in the PCR-ed3-EN-2015 04 02 are available in the digital database of pep-ecopassport.org website. The environmental impacts of the Reference Product are representative of the products covered by the PEP, which therefore constitute a homogeneous environmental family.

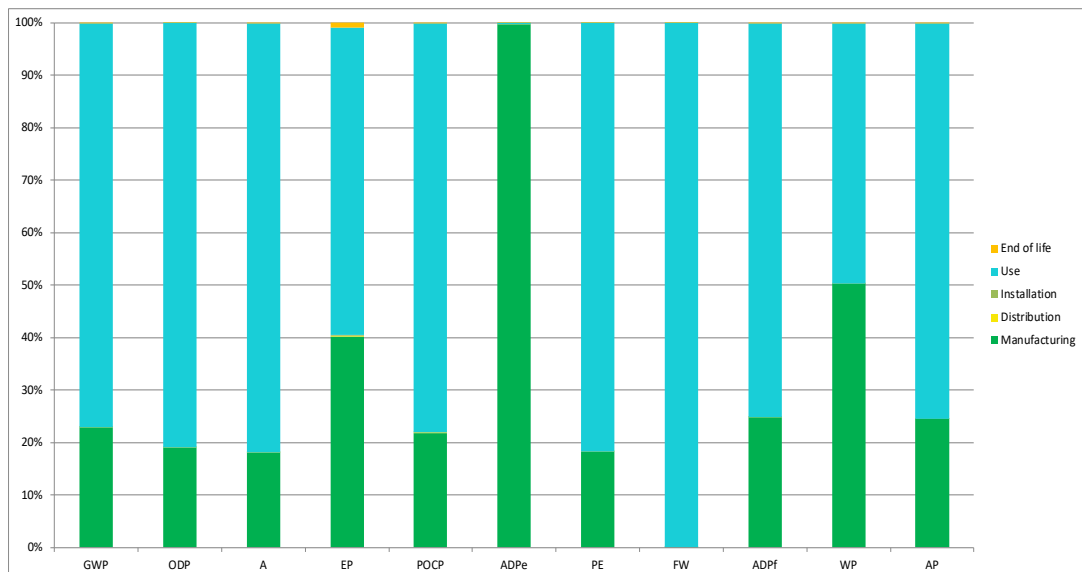

The environmental impact of the Reference Product occurs predominantly during the use phase.

# Product Environmental Profile

## Line metered PDU (PXE, PX-1k)



### ENVIRONMENTAL IMPACTS (continued)

For product family of line metered PDU which product model is PX3-1XXX, "XXX" simply a 3digit number to distinguish variants with same function but different form factor.

Data shows for reference product that all indicators except ADPe are dominated in Use Phase which mainly affected by electricity consumption. For other products than the Reference Product the manufacturing phase impacts are proportional to the number of outlet/ socket and the Use phase is proportional to the electrical consumption. For the Distribution, Installation and End of life phase take the same values.

Registration number: LGRP-00425-V01.01-EN	Drafting rules: "PCR-ed3-EN-2015 04"
Verifier's accreditation number: VH02	Information and reference documents: <a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
Date of issue: 11-2020	Validity period: 5 years
Independent verification of the declaration and data, in compliance with ISO 14025:2010 Internal <input checked="" type="checkbox"/> External <input type="checkbox"/>	
The PCR Review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN).	
The elements of the present PEP cannot be compared with elements from another program.	
Document in compliance with ISO 14025:2010: "Environmental labels and declarations - Type III environmental declarations"	
In compliance with ISO 14040:2006: "Environmental management - LCA - Principles and framework"	
In compliance with ISO 14044:2006: "Environmental management - LCA - Requirements and guidelines"	
In alignment with EN 15804:2012+A1:2013: "Sustainability of construction works - EPD's - Core rules for the product category of construction products"	